


## FOXES Power-track mounted spotlights

3-ph. power-track mounted spotlight with cylindrical head and slender equipment support box placed directly on the power track gives the spotlight a modern and understated elegance.

Use of highly efficient reflector technology especially tailored to the geometry of the spotlight, exclusive use of Philips LED Fortimo modules and Xitanium drivers.

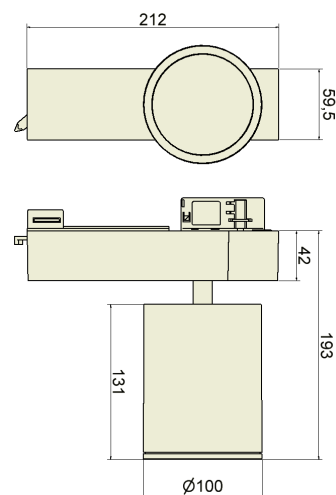

Housing:	die-cast aluminium
Colour:	white, black, silver
Radius:	90° pivotable and 355° rotatable
Light color:	3000K
Colour reproduction:	CRI>90
Lumen class:	3000 lm
Connection power:	34W
Service life:	50000 hours L80B10 at Ta25°
Binning:	MacAdam 3
Guarantee:	5 year guarantee
Beam angle:	spot, medium, flood, wideflood
Refrigeration:	passive
Nominal voltage:	220-240V, 50/60 Hz
Weight:	1,4 kg
Approval mark:	CE, IP20

**Other colour temperatures, colour reproductions, connecting cables as well as food applications possible on request.**


Item no.	FOXES Power-track mounted spotlights
lws110s930p-15063000.034si	Leuchtwerk FOXES <b>SPOT</b> 34W/930PW 3000lm silver
lws110s930p-15063000.034sw	Leuchtwerk FOXES <b>SPOT</b> 34W/930PW 3000lm black
lws110s930p-15063000.034ws	Leuchtwerk FOXES <b>SPOT</b> 34W/930PW 3000lm white
lws110m930p-15063000.034si	Leuchtwerk FOXES <b>MEDIUM</b> 34W/930PW 3000lm silver
lws110m930p-15063000.034sw	Leuchtwerk FOXES <b>MEDIUM</b> 34W/930PW 3000lm black
lws110m930p-15063000.034ws	Leuchtwerk FOXES <b>MEDIUM</b> 34W/930PW 3000lm white
lws110f930p-15063000.034si	Leuchtwerk FOXES <b>FLOOD</b> 34W/930PW 3000lm silver
lws110f930p-15063000.034sw	Leuchtwerk FOXES <b>FLOOD</b> 34W/930PW 3000lm black
lws110f930p-15063000.034ws	Leuchtwerk FOXES <b>FLOOD</b> 34W/930PW 3000lm white
lws110w930p-15063000.034si	Leuchtwerk FOXES <b>WIDEFLOOD</b> 34W/930PW 3000lm silver
lws110w930p-15063000.034sw	Leuchtwerk FOXES <b>WIDEFLOOD</b> 34W/930PW 3000lm black
lws110w930p-15063000.034ws	Leuchtwerk FOXES <b>WIDEFLOOD</b> 34W/930PW 3000lm white

All technical data as well as dimensions and weights were carefully prepared. Technical changes and errors reserved.  
Luminous fluxes, connecting cables and efficiency specifications can contain a tolerance of +/- 10%. Product photos and dimensional sketches may contain minor variations.


# FOXS Power-track mounted spotlights

## Light distribution curves


### Polar diagram:

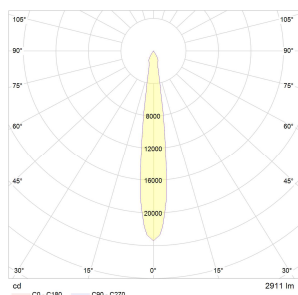


Spot

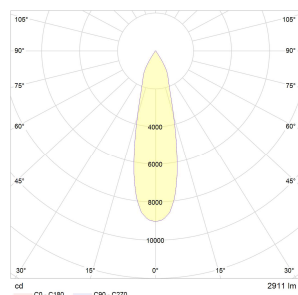

Medium

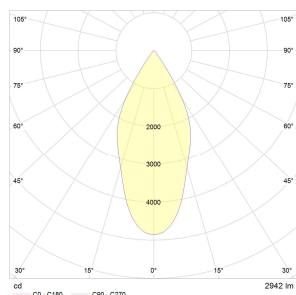


Flood

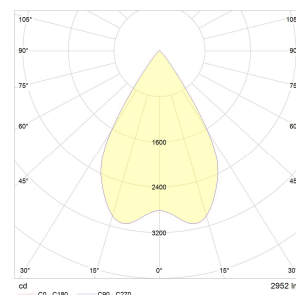


Wide Flood


### Cone diagram:

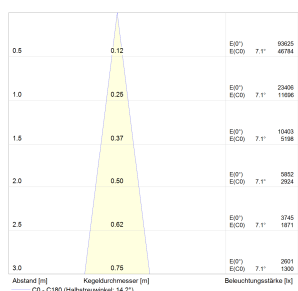


Spot

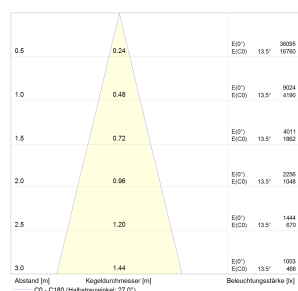

Medium

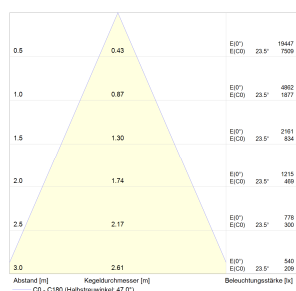

Flood

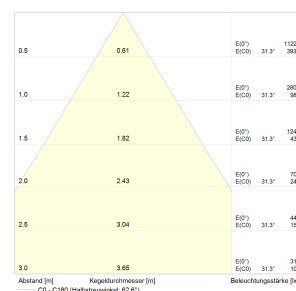

Wide Flood

All technical data as well as dimensions and weights were carefully prepared. Technical changes and errors reserved.  
 Luminous fluxes, connecting cables and efficiency specifications can contain a tolerance of +/- 10%. Product photos and dimensional sketches may contain minor variations.