


KOU DUO Recessed spotlights

The extendable spotlight head can facilitate a multitude of different lighting situations. The highest degree of light quality is ensured thanks to state-of-the-art LED and reflector technology. The ceiling cut-out to be made is 290x2R75 mm.



Housing:	die-cast aluminium
Colour:	white
Radius:	90° pivotable and 355° rotatable
Light colour:	3000K
Colour reproduction:	CRI>90
Lumen class:	3000 lm
Connection power:	34W
Service life:	50000 hour L80B10 at Ta25°
Binning:	MacAdam 3
Guarantee:	5 year guarantee
Beam angle:	spot, medium, flood, wideflood
Refrigeration:	passive
Installation depth:	120 mm
Nominal voltage:	220-240V, 50/60 Hz
Weight:	3 kg
Approval mark:	CE, IP20

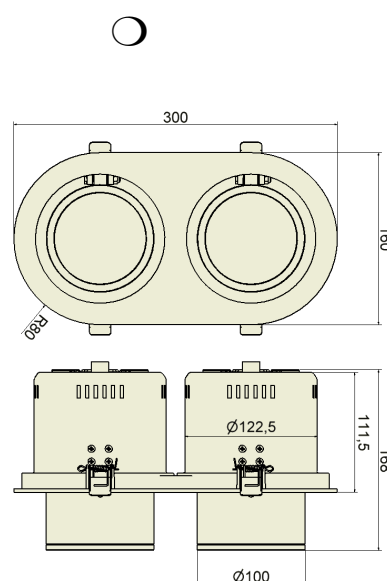


Other colour temperatures, colour reproductions, connecting cables as well as food applications possible on request.

Item no.	KOU DUO Recessed spotlights
lws625s930p-15063000.068ws	Leuchtwerk KOU DUO SPOT 34W/930PW 3000lm white
lws625m930p-15063000.068ws	Leuchtwerk KOU DUO MEDIUM 34W/930PW 3000lm white
lws625f930p-15063000.068ws	Leuchtwerk KOU DUO FLOOD 34W/930PW 3000lm white
lws625w930p-15063000.068ws	Leuchtwerk KOU DUO WIDEFLOOD 34W/930PW 3000lm white


KOU DUO Recessed spotlights

Light distribution curves


Polar diagram:

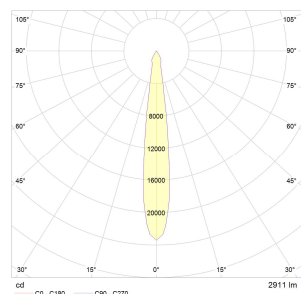


Spot

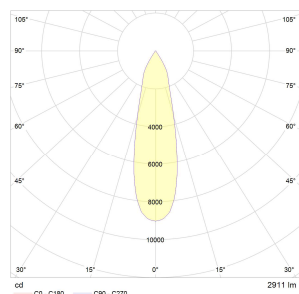

Medium

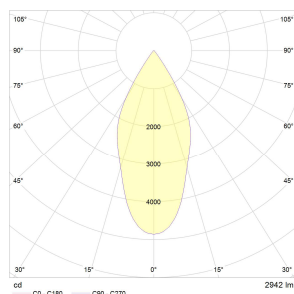


Flood

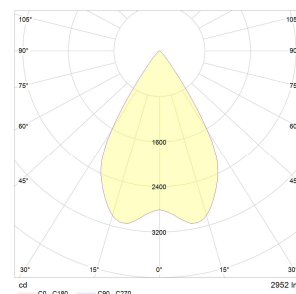


Wideflood


Cone diagram:

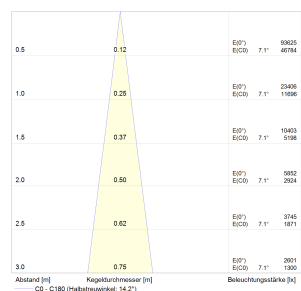


Spot

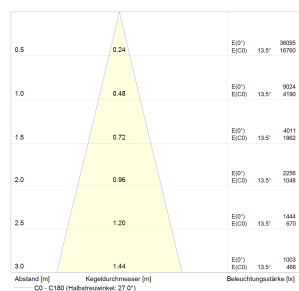

Medium

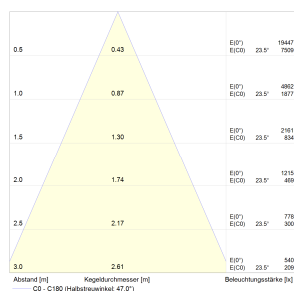

Flood

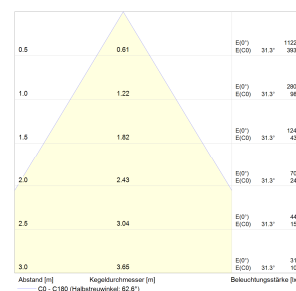

Wideflood

All technical data as well as dimensions and weights were carefully prepared. Technical changes and errors reserved.
Luminous fluxes, connecting cables and efficiency specifications can contain a tolerance of +/- 10%. Product photos and dimensional sketches may contain minor variations.